




PRODUCT TYPE C

Single Compression Gland for Armoured Cable featuring Dedicated Armour Clamping

Ex e : Ex ta : IP66 Class I Div 2 : AEx e : AEx ta

PART NUMBERS:

C	1	W	B	*	E	*
	3	X	S	IE		R
A						

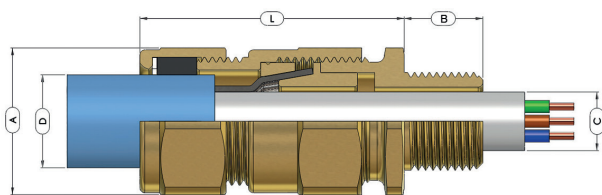

REFERENCE NUMBER: 1.2.2

EXAMPLE PART NUMBERING:
C1WBE/NP/20/050NPT

C	Gland featuring armour specific clamping
1	Neoprene Seal (1) - Silicone Seal (3)
W	SWA (W) / SWB or STA (X)
B	Aluminium (A) / Brass (B) / Stainless Steel (S)
IE	Integral Earth
E	Ex e & Ex ta Certification
R	Reduced Bore Outer Sheath Seal
C	PVC Shroud (C) - PCP Shroud (P) - LSOH Silicone Shroud (3)
K-V-H	Locknut, Earth Tag & Nylon (K), Fibre (V) or PTFE (H) IP Washer
S	Including Serrated Washer
1	Quantity per kit
NP	Nickel Plated
20	Gland shell size
050NPT	1/2"NPT Male Entry Thread

OPTIONAL ACCESSORIES:

LOCKNUT	Brass (ACBLN) / St Steel (ACSLN) / Aluminium (ACALN)
EARTH TAG	Brass (ACBET) / St Steel (ACSET) / Aluminium (ACAET)
IP WASHERS	Nylon (ACNSW) / Fibre (ACFSW) / PTFE (ACPSW)
SERRATED WASHERS	Stainless Steel (ACSSW)
SHROUDS	PVC (ACSPVC) / PCP (ACSPCP) / LSOH Silicone (ACSSIO)

IP RATING:	IP66, Type 4X
OPERATING TEMP:	Neoprene Seals -35°C to +90°C / Silicone Seals -60°C to +180°C
MATERIALS:	Aluminium, Brass or Stainless Steel
PLATING:	Electroless Nickel

PRODUCT DESCRIPTION

"C" type single compression glands are certified Increased Safety Ex e and Dust Protected Ex ta. They are suitable for use in Zone 1 and 2 for Gas Groups IIA, IIB and IIC and additionally for use in Zones 20, 21 and 22 for Dust Groups IIIA, IIIB and IIIC. Also certified for Class I Zone 1 & Class I Div 2 installations for use with Marine Shipboard & Tray Cables under NEC & CEC. The gland is suitable for cables that exhibit "cold flow" characteristics, whilst providing an IP66 environmental seal on the cable outer sheath and a detachable armour specific clamping system for wire (W), braid/tape (X) armoured cables. The "IE" version allows the gland to be used with HV cables where the fault load is greater than 10.4kA and options are available for use with LSOH cables and extreme temperature applications.

COMPLIANCE STANDARDS:

EN 60079-0, EN 60079-7, EN 60079-31
IEC 60079-0, IEC 60079-7, IEC 60079-31 & IEC 60529
C22.2 (see certificate), CAN/CSA 60079-0/7
UL514B, UL1203, UL2225, UL50E, ANSI/UL 60079-0/7, ISA 60079-31

CERTIFICATION:

ATEX	II 1D 2G Ex e IIC Gb / Ex ta IIIC Da
IECEx	Ex e IIC Gb / Ex ta IIIC Da
CEC - Canada	Class I Zone 1 Ex e II Class I Division 2, Groups A, B, C & D Class II Division 1, Groups E, F & G Class III, Enclosure Type 4X
NEC - USA	Class I Zone 1 AEx e IIC Gb / Class II Zone 20 AEx ta IIIC Da Class II Division 1, Groups E, F & G Class III, Enclosure Type 4X
EAC	Exe IIU
INMETRO - Brazil	Ex e IIC Gb / Ex ta IIIC Da
SAC - China	Ex e IIC
UKRAINE	Ex e II X
CCoE - India	Petroleum Rules 2002 (PESO)
ABS	Specified ABS Rule
LLOYD'S	Enclosure Systems (Part 1B)
RMRS	Part XI of RS Rules for the classification & construction of sea-going ships (ed. 2014)

CERTIFICATION No:

ATEX	SIRA 01ATEX1271X
IECEx	IECEx SIR 07.0097X
CEC - Canada	CSA 1356011
NEC - USA	CSA 2627370
EAC	RU C-GB.Γ506.B.00098
INMETRO - Brazil	NCC 13.2186 X
SAC - China	NEPSI GYJ16.1400X
UKRAINE	UA.TR.047.C.0408-13 & 2937
CCoE - India	PESO P365300/13
ABS	14-LD463991-1-PDA
LLOYD'S	10/00056(E1)
RMRS	14.02755.315

CABLE GLAND SELECTION TABLE
(ALL DIMENSIONS IN mm)

Gland size	Entry Thread Size		Metric Thread Length [B]	Cable Acceptance Details						Armour Acceptance Range		Nominal Protusion Length [L]	Dimensions/Weight (Metric)			Shroud Size
	Metric	NPT		Inner Sheath [C]		Outer Sheath [D]		Reduced [D]		W	X		Across Flats [A]	Across Corners	Weight Kgs	
				Min	Max	Min	Max	Min	Max							
16	M16 x 1.5	1/2" or 3/4"	16	N/A	8.4	8.4	13.5	4.9	10.0	0.90	0.15-0.35	58	24.0	26.5	0.143	L24
16	M20 x 1.5	1/2" or 3/4"	16	N/A	8.4	8.4	13.5	4.9	10.0	0.90	0.15-0.35	58	24.0	26.5	0.154	L24
20S	M20 x 1.5	1/2" or 3/4"	16	N/A	11.7	11.5	16.0	9.4	12.5	0.90-1.25	0.15-0.35	58	24.0	26.5	0.125	L24
20	M20 x 1.5	1/2" or 3/4"	16	N/A	14.0	15.5	21.1	12.0	17.6	0.90-1.25	0.15-0.50	58	30.0	33.0	0.180	L30
25	M25 x 1.5	3/4" or 1"	16	N/A	20.0	20.3	27.4	16.8	23.9	1.25-1.60	0.15-0.50	58	37.6	41.4	0.256	L38
32	M32 x 1.5	1" or 1 1/4"	16	N/A	26.3	26.7	34.0	23.2	30.5	1.60-2.00	0.15-0.55	65	46.0	50.6	0.400	L46
40	M40 x 1.5	1 1/4" or 1 1/2"	16	N/A	32.2	33.0	40.6	28.6	36.5	1.60-2.00	0.20-0.60	72	55.0	60.5	0.649	L55
50S	M50 x 1.5	1 1/2" or 2"	16	N/A	38.2	39.4	46.7	34.8	42.4	2.00-2.50	0.20-0.60	73	65.0	71.5	0.940	L65
50H	M50 x 1.5	1 1/2" or 2"	16	N/A	38.2	45.7	53.2	41.1	48.5	2.00-2.50	0.30-0.80	73	65.0	71.5	0.849	L65
50	M50 x 1.5	2"	16	N/A	44.1	45.7	53.2	41.1	48.5	2.00-2.50	0.30-0.80	73	65.0	71.5	0.707	L65
63S	M63 x 1.5	2" or 2 1/2"	19	N/A	50.1	52.1	59.5	47.5	54.8	2.50	0.30-0.80	76	80.0	88.0	1.369	L80
63H	M63 x 1.5	2" or 2 1/2"	19	N/A	50.1	58.4	65.8	53.8	61.2	2.50	0.30-0.80	76	80.0	88.0	1.306	L80
63	M75 x 1.5	2 1/2"	19	N/A	56.0	58.4	65.8	53.8	61.2	2.50	0.30-0.80	76	80.0	88.0	1.123	L80
75S	M75 x 1.5	2 1/2" or 3"	19	N/A	62.0	64.8	72.2	60.2	68.0	2.50	0.30-1.00	82	90.0	99.0	1.661	L90
75H	M75 x 1.5	2 1/2" or 3"	19	N/A	62.0	71.1	78.0	66.5	73.4	2.50	0.30-1.00	82	90.0	99.0	1.553	L90
75	M80 x 2.0	3"	19	N/A	68.0	71.1	78.0	66.5	73.4	2.50	0.30-1.00	82	90.0	99.0	1.310	L90
80	M80 x 2.0	3" or 3 1/2"	25	N/A	72.0	77.0	84.0	71.9	79.4	3.15	0.45-1.00	110	104.0	115.2	2.718	L104
80H	M85 x 2.0	3" or 3 1/2"	25	N/A	72.0	79.6	90.0	75.0	85.4	3.15	0.45-1.00	110	104.0	115.2	2.489	L104
85	M90 x 2.0	3" or 3 1/2"	25	N/A	78.0	79.6	90.0	75.0	85.4	3.15	0.45-1.00	110	104.0	115.2	2.326	L104
90	M90 x 2.0	3 1/2" or 4"	25	N/A	84.0	88.0	96.0	82.0	91.4	3.15	0.45-1.00	110	114.0	125.7	2.852	L114
90H	M90 x 2.0	3 1/2" or 4"	25	N/A	84.0	92.0	102.0	87.4	97.4	3.15	0.45-1.00	110	114.0	125.7	2.629	L114
100	M100 x 2.0	3 1/2" or 4"	25	N/A	90.0	92.0	102.0	87.4	97.4	3.15	0.45-1.00	110	114.0	125.7	2.496	L114

NOTES

- Gland size does not necessarily equate to the entry thread size.
- Dimensions (A) & (B) may differ for glands with non metric entry threads. Please refer to our "Thread Reference Tables" for specific dimensions.
- Assembly instructions must be read prior to installation and adhered to in full.
- Peppers supply cable glands with parallel entry threads that conform to the flameproof threaded joint requirements of IEC/EN 60079-1 and other equivalent standards. They usually incorporate a thread run out according to the available machining techniques and will not have a full form thread for the entire length.

- Peppers Cable Glands Limited will not be held responsible for clients' installations where this has not been taken into account.
- When selecting IP Washer & Shroud material for use with glands, please be aware of the accessories temperature range to ensure they are suitable for the intended installation.
- Where approval in addition to ATEX, IECEx and CSA is required, this must be clearly requested at time of enquiry / order.